

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
7 October 2004 (07.10.2004)

PCT

(10) International Publication Number  
**WO 2004/085247 A1**

(51) International Patent Classification<sup>7</sup>: B64C 1/06

(21) International Application Number:  
PCT/EP2004/003308

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
103 14 039.5 28 March 2003 (28.03.2003) DE

(71) Applicant (for all designated States except US): AIRBUS  
DEUTSCHLAND GMBH [DE/DE]; Kreetzlag 10, 21129  
Hamburg (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LÜTTIG, Helmut  
[DE/DE]; Braunstieg 21a, 22119 Hamburg (DE). PAUL,  
Carsten [DE/DE]; Auefeld 9, 21441 Garstedt (DE).


(74) Agent: KOPF, Korbinian; Maiwald Patentanwalts  
GMBH, Elisenhof, Elisenstrasse 3, 80335 München (DE).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KB,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MY, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: INTEGRAL FRAME MEMBER FOR AN AIRCRAFT

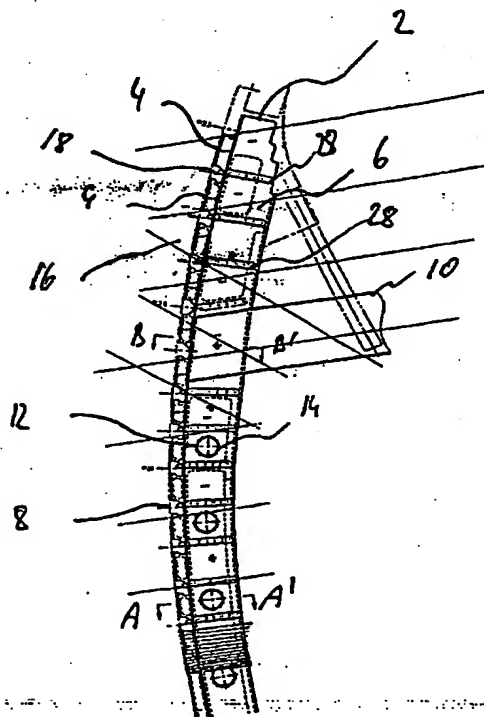

(57) Abstract: According to an exemplary embodiment  
of the present invention, a frame member for an aircraft is  
provided comprising a clip region (4) and a frame region  
(6). According to an aspect of this exemplary embodiment  
of the present invention, the clip region (4), shear web re-  
gion (16) and the frame region (6) are integrated into the  
frame member and be formed from an extrusion mold by a  
milling process. Advantageously, this allows for a reduced  
number of individual elements for forming a frame mem-  
ber and provides the flexibility of variation of the forms  
and dimensions of a frame member for an aircraft.

WO 2004/085247 A1



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Published:

— with international search report

## Integral frame member for an aircraft

The present invention relates to support structures of an aircraft and in particular to a  
5 frame of the aircraft. In particular, the present invention relates to a frame member  
for an aircraft, to an aircraft comprising a frame member and to methods of  
manufacturing a frame member.

In today's aircrafts, the frames usually consist of a plurality of individual elements.  
10 Usually, more than 10 individual parts are glued, riveted, clipped and/or screwed  
together. In particular, the clips and the shear webs for connecting the skin and the  
stringers of the aircraft to the frame are connected to the frame by rivets.  
Reinforcement straps or angles are usually glued or riveted to the frame. Due to this  
complex construction, the manufacturing of such frames is time consuming and  
15 complex.

Furthermore, the assembly was complicated and ineffective due to the necessity of  
connecting a plurality of individual elements for forming one frame. The frame itself  
usually made from bended sheet metal or extruded profiles and had a fixed thickness  
20 and fixed dimensions which disadvantageously didn't allow for any flexibility, for  
example, for reinforcements in areas where increased stress was applied to the frame  
and smaller dimensions where less stress was applied. Also, no flanging holes could  
be made into the frame due to the danger of cracks. Due to this, system lines, such as  
electric cables and/or pipes are usually arranged on the frame i.e. between the frame  
25 on the inner cover of the aircraft body.

It is an object of the present invention to provide for an improved frame member.

According to an exemplary embodiment of the present invention as set forth in claim  
30 1, a frame member for an aircraft is provided comprising a clip region and a frame  
region. According to an aspect of this exemplary embodiment of the present

- 2 -

invention, the clip region and the frame region are integral. Advantageously, this allows for a simple assembly of the frame. Furthermore, this allows for a frame member having a simple design and construction which may be produced at low cost. Also, for example due to fact that no connection elements such as rivets have to be provided, the frame member according to this exemplary embodiment of the present invention may have a reduced weight.

According to another exemplary embodiment of the present invention as set forth in claim 2, a plurality of clip regions are provided for forming a shear web region for supporting a skin of an aircraft. The clip region, the shear web region and the frame region are one piece.

Advantageously, the provision of a "one piece" frame member may allow for an improved handling during assembly of the aircraft. Furthermore, a quality control of the frame member can be made more efficiently, since a reduced number of connections have to be tested.

According to another exemplary embodiment of the present invention as set forth in claim 3, the frame member is formed from one extrusion molded profile. Advantageously, this allows for a very simple manufacture of the frame member. According to an aspect of this exemplary embodiment of the present invention, the one extrusion molded profile used for forming the frame member is designed such that all variances i.e. form and dimension changes occurring for such frame member are taken into consideration. In other words, for manufacturing the frame member according to this exemplary embodiment of the present invention, only one "raw material" is needed, namely the extrusion molded profile. From this one extrusion molded profile, frame members having different dimensions and forms may be

- 3 -

formed. Furthermore, from this extrusion molded profile, a one piece frame member including a clip region, a shear web region and a frame region may be formed.

5 According to another exemplary embodiment of the present invention as set forth in claim 4, the frame member is formed from the one extrusion molded profile by a milling process. This allows for a very fast and efficient manufacturing of the frame member. Furthermore, due to today's milling technology, a very accurate manufacturing may be provided which may largely be automatised, for example by a computer added milling.

10

Furthermore, due to the milling, at least one of a form, thickness and dimension of the different regions of the frame member may simply be realized by a suitable milling. Advantageously, this allows, for example, to have a frame region having an increased thickness for locations in the aircraft where an increased stress is applied to  
15 the frame member and on the other hand to have portions of the frame member having a reduced thickness for the application in locations of the aircraft where less stress is applied to the frame member. This allows for an increased design flexibility and may allow to further reduce a weight of the frame member.

20 According to another exemplary embodiment of the present invention as set forth in claim 5, a cut out is formed in at least one of the clip region, the shear web region and the frame region, for example, for accommodating at least one of electrical lines, pipes and system lines or to reduce the weight of the frame member.

Advantageously, due to the arrangement of the lines "in" the frame member, a very  
25 efficient use of space may be provided. Furthermore, in comparison to aircrafts where the lines were usually arranged on the inside of the frame member, an improved safety may be provided since the lines are better protected from, for example, an impact or a bash.

- 4 -

According to another exemplary embodiment of the present invention as set forth in claim 6, the cut out is provided with a border reinforcement which allows to avoid cracks in a region surrounding the cut out. This may allow for an improved durability of the frame member. Furthermore, this may allow for an improved security due to the fact that cracks may be avoided. Advantageously, the border reinforcement is formed by a milling which allows for a flexible and fast formation of the border reinforcement. Advantageously, due to the fact that the border reinforcement is milled into the extrusion molded profile, the border reinforcement also is part of the "one piece" frame member.

According to another exemplary embodiment of the present invention as set forth in claim 7, the clip region is adapted for connection to a stringer of the aircraft. Advantageously, this allows for a direct connection of the frame member with a support bracket to the stringer in comparison to known systems where the frame was connected to a clip and the clip was then connected to the stringer. This may allow for an improved durability and may allow a different thickness and form of the stringer support bracket.

According to another exemplary embodiment of the present invention as set forth in claim 8, the shear web region of the frame member is adapted for supporting a skin of the aircraft. For example, a base may be provided on the shear web region for providing a support for the skin.

According to another exemplary embodiment of the present invention as set forth in claim 9, an aircraft is provided comprising a frame member according to one of the above exemplary embodiments.

- 5 -

According to another exemplary embodiment of the present invention as set forth in claim 10, a method of manufacturing a frame member having a clip region, a shear web region and a frame region is provided. According to this exemplary embodiment of the present invention, firstly a mold is manufactured. Then, the clip region, the shear web region and the frame region of the frame member or at least one of these regions is manufactured by performing a milling of the mold. Advantageously, this allows for a very fast cheap and efficient manufacturing method for manufacturing a one piece frame member. In other words, according to this exemplary embodiment of the present invention, a frame member is manufactured where the clip region, the shear web region and the frame region are integral parts of the frame member.

According to another exemplary embodiment of the present invention as set forth in claim 11, the mold is manufactured by extrusion molding which allows for a simple and reliable manufacturing of the mold.

According to another exemplary embodiment of the present invention as set forth in claim 12, at least one of the clip region, the shear web region and the frame region has varying first dimensions varying between a minimum and a maximum. In other words, the frame member according to this exemplary embodiment of the present invention may have different form and/or dimensions in different locations of the frame member. According to this method, the mold is manufactured such that these different dimensions and/or forms are taken into consideration i.e. the mold is manufactured such that a second dimension of the mold essentially coincides with the maximum. Due to the fact that the mold is manufactured such that all variations of the frame member planned may be formed into the mold by milling, a very simple efficient and flexible manufacturing method is provided. Also, since only one starting material is needed namely the pre-manufactured mold, the manufacturing

- 6 -

process may be made more reliable since a mistaken use of a wrong starting material may be avoided.

5 According to another exemplary embodiment of the present invention as set forth in claim 13, before the milling is performed for forming the particular regions of the frame member, the mold is bent. In particular, the mold may be bent for adapting a curvature of the frame member to a curvature of the skin of the aircraft. The bending may be performed by a stretch forming process.

10 It may be seen as the gist of an exemplary embodiment of the present invention that an integral frame member is provided where a clip, a shear web and a frame region are one piece or, in other words, where the clip and the shear web region for allowing a connection to a skin and a stringer of an aircraft, and the frame itself are integrated into one part. Advantageously, this frame member may be formed from an extrusion  
15 mold by a milling process.

These and other aspects of the present invention will become apparent from and will be elucidated with reference to the embodiments described hereinafter.

20 Exemplary embodiments of the present invention will be described in the following, with reference to the following drawings:

Fig. 1 shows a side view of an exemplary embodiment of a frame member according to the present invention.

25

Fig. 2 shows a cross-sectional view taken along AA' in Fig. 1.



Fig. 3 shows a side view of an exemplary embodiment of a frame member according to the present invention.

Fig. 4 shows a cross-sectional view of an extrusion molded profile according to an exemplary embodiment of the present invention where a cross-sectional view of the frame member taken along line BB' in Fig. 1 is projected.

In the following description of Figs. 1 – 4, the same reference numerals are used to designate the same or corresponding elements.

10

Fig. 1 shows a cross-sectional view of a frame member 2 according to an exemplary embodiment of the present invention. As may be taken from Fig. 2, the frame member 2 comprises a frame region 6. The frame region 6 is designed and adapted to provide for a structural support of a structure of the aircraft. The frame region 6 has a curvature adapted to a cross-section of a body of the aircraft. On the frame region 6, there are provided a plurality of clip regions 4 which may also be referred to as clips. The plurality of clip regions 4 form a shear web region 16. The shear web region 16 is provided for supporting a skin 8 of the aircraft. Between two clip regions 4, there is provided a cut out 18 for the stringer. At the location of the cut out 18, there may be provided a stringer support bracket 28. The clip region 4 and/or the stringer support brackets 28 are adapted for connection to a stringer of the aircraft.

Reference numeral 10 in Fig. 1 designates a support which may be riveted to the frame region 6. Reference numeral 12 in Fig. 1 designates a cut out which may be provided in the frame member. The cut out 12 may be provided in the frame region 6. However, it may also be possible to provide cut outs in the clip region or the shear web region. The cut out 12 may be adapted to accommodate system lines of the aircraft such as electrical lines, pipes and communication lines. Advantageously, this

- 8 -

may allow for a very space and weight saving arrangement of the system lines because of shortening the length of the system routing. Furthermore, due to the fact that the system lines are accommodated between the frame members, the system lines are very well protected from impacts or bashes which may allow for an improved safety.

Advantageously, the cut out 12 reduces the weight of the frame member and is provided with a border reinforcement which advantageously may allow to avoid for cracks in the region surrounding the recess. This may allow for an improved reliability and durability of the frame member.

Fig. 2 shows a cross-sectional view of the frame member of Fig. 1 taken along line AA- in Fig. 1. As may be taken from Fig. 2, the cross-sectional form of the frame member is a single T form with one flange of the end 40 is cut away. The clip region 4 as indicated above is provided with a support for supporting the skin 8 of the aircraft. The frame region 6 may be provided with a region having an increased thickness for allowing for a strength and durability of the frame member. Due to a variation of a thickness of particular regions of the frame member, the frame member may flexibly be adapted to stresses applied at particular locations. Due to this, a frame member may be provided having an increased strength while having a low weight. In comparison to a known frame member consisting, as described above, of sometimes more than 10 individual pieces, for aircraft such as the Airbus 380 family, the weight may be reduced by 6.2 kg for each frame member.

As may be taken from Fig. 2, the cut out 12 may be provided with a border reinforcement 14. Furthermore, a rim 42 may be provided allowing for an improved stability.

- 9 -

Fig. 3 shows another side view of an exemplary embodiment of a frame member according to the present invention. As may be taken from Fig. 3, for example at the location 20, where a support 10 is attached to the frame member 2, the clip region 4 may be elongated and the height of the frame member 2 may be increased too. This  
5 may allow for more space for a connection between the support 10 and the frame member 2.

Fig. 4 shows a cross-sectional view of an extrusion molded profile 46 according to an exemplary embodiment of the present invention. In this cross-sectional view of the  
10 extrusion molded profile 46, a cross-section of a frame member according to an exemplary embodiment of the present invention such as, for example, taken along line BB' in Fig. 1 is shown. As may be taken from Fig. 4, the extrusion molded profile 46 according to this exemplary embodiment of the present invention is formed such that all form and/or dimension changes of the frame member 2  
15 occurring for this particular type of frame member may be covered. For example, an end 40 of the frame member 2 facing to an outside of the aircraft may have an L structure as shown in Fig. 2 but also may have a T structure as shown in Fig. 4. Also, the end 40 may have dimensions up to the bold line indicating the outer circumference of the extrusion molded profile 46. Also, the rim 42 may have  
20 different dimensions or may be even cut away.

As may be taken from Fig. 4, a thickness of the material, for example between end 40 and rim 42, may be reduced too, for example, allow for a further reduction of the weight of the frame member 2. The cut out 12 provided with the border  
25 reinforcement 14 may also have different dimensions and may by this be adapted for accommodating, for example, a system line 48. The end 40 of the frame member 2 as indicated with reference to Fig. 4 may be provided with a support for the skin 8 of the aircraft. As indicated in Fig. 4, a height of the frame member 2 may be varying.

- 10 -

The end 44 may be provided with a rim allowing for an improved stability. The end 44 may have an L structure as shown in Fig. 4 but also may have other forms e.g. a T structure.

- 5 According to an exemplary embodiment of the present invention, the frame member according to the present invention may be manufactured as follows. Firstly, one profile is made covering all form and/or dimensions variances of the desired frame member. Advantageously, as indicated above, the profile may be manufactured by an extrusion molding process. Then, for adapting a curvature of the frame member to
- 10 the curvature of the cross-section of the body of the aircraft, the mold is bent accordingly. Advantageously, the bending is performed by a stretch forming process. Then, subsequently to the stretch forming process, a milling process is performed for forming the frame member. As may be taken from Figs. 1 - 4, the milling process may flexibly adapt a form and/or dimension of the frame member to the requirements
- 15 at the location where the frame member is to be assembled to the aircraft. Advantageously, this may allow for a simple manufacturing of a frame member where the function of the clip, of the shear web, and of the frame are integrated into one piece. Advantageously, this allows for a combination of an extrusion molded profile and of a milling process. Furthermore, the number of individual elements for
- 20 forming the frame member may be reduced significantly in comparison to the prior art where up to 10 individual elements are combined for forming the frame member. The frame members are usually dimensioned with respect to a fatigue. Advantageously, due to the above described manufacturing method, a 2xxx material may be used which in combination with the above manufacturing and the
- 25 construction of the frame member according to the present invention may allow for higher fatigue stresses. According to another exemplary embodiment of the present invention, the frame member may be made from aluminium alloy such as, for example, Al-Li.

- 11 -

Furthermore, according to an exemplary embodiment of the present invention, a cut out may be provided in regions of the frame member. Advantageously, this may allow for an integration of system lines into the frames. In other words, in addition to  
5 the support function of the frame member, the frame member may also serve as support for system lines.

CLAIMS:

1. Frame member (2) for an aircraft, comprising:  
5       a clip region (4); and  
         a frame region (6);  
         wherein the clip region (4) and the frame region (6) are integral.
2. The frame member (2) of claim 1,  
10       wherein a plurality of clip regions (4) are provided forming a shear web  
         region (16); and  
         wherein the clip region (4), the shear web region (16) and the frame region  
         (6) are formed as one piece.
- 15   3. The frame member (2) of one of claims 1 and 2,  
         wherein the frame member (2) is formed from one extrusion molded profile  
         (46).
4. The frame member (2) of claim 3,  
20       wherein the frame member (2) is formed from the one extrusion molded  
         profile (46) by a milling process.
5. The frame member (2) of one of claims 1 to 4,  
         wherein a cut out (12) is formed in at least one of the clip region (4), the shear  
25   web region (16) and the frame region (6) for accommodating at least one of electrical  
         lines (48), pipes and system lines or for reduction of the weight.
6. The frame member (2) of claim 5,

- 13 -

wherein the cut out (12) is provided with a border reinforcement (14); and  
wherein the border reinforcement (14) is formed by milling.

7. The frame member (2) of one of claims 1 to 6,  
5        wherein the clip region (4) is adapted for connection to a stringer or skin of  
the aircraft.
8. The frame member (2) of one of claims 2 to 7,  
      wherein the shear web region (16) is also adapted for supporting a skin (8) of  
10 the aircraft.
9. Aircraft comprising a frame member (2) according to one of claims 1 to 8.
10. A method of manufacturing a frame member (2) having a clip region (4), a shear  
15 web region (16) and a frame region (6), the method comprising the steps of:  
      manufacturing a mold (46); and  
      forming the clip region (4), the shear web region (16) and the frame region  
(6) of the frame member (2) by a milling of the mold (46).
- 20 11. The method of claim 10,  
      wherein the mold (46) is manufactured by extrusion molding.
12. The method of one of claims 10 and 11,  
      wherein at least one of the clip region (4), the shear web region (16) and the  
25 frame region (4) has varying first dimensions varying between a minimum and a  
maximum; and  
      wherein the mold (46) is manufactured such that a second dimension of the  
mold essentially coincides with the maximum.

- 14 -

13. The method of one of claims 10 to 12,  
wherein the mold (46) is bent by a stretch forming process; and  
wherein, subsequently to the stretch forming process, the milling is performed  
5 for forming the frame member (2).



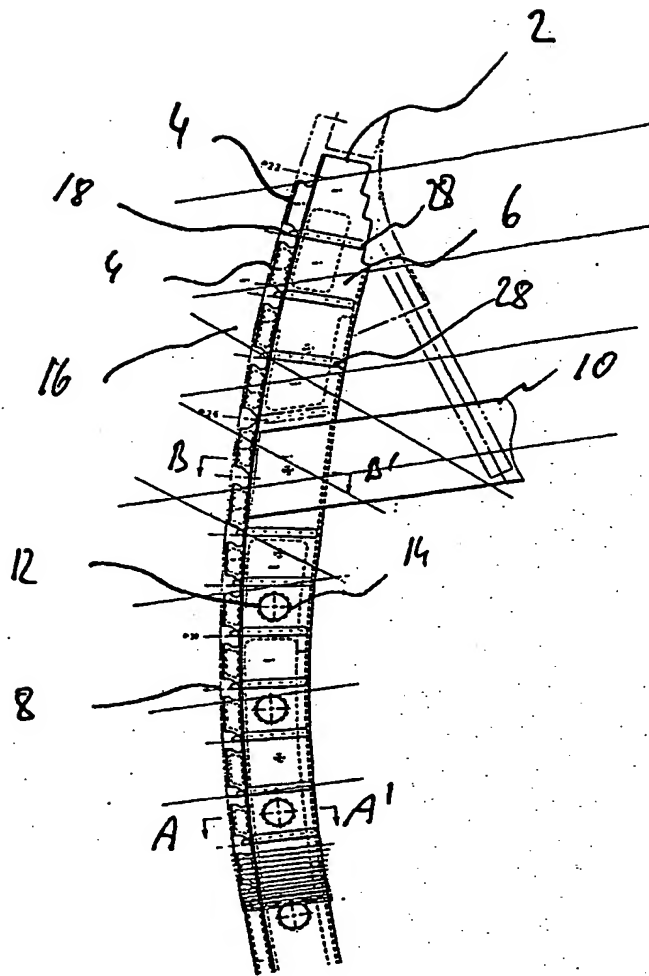


Fig. 1

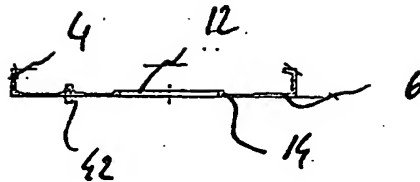


Fig. 2

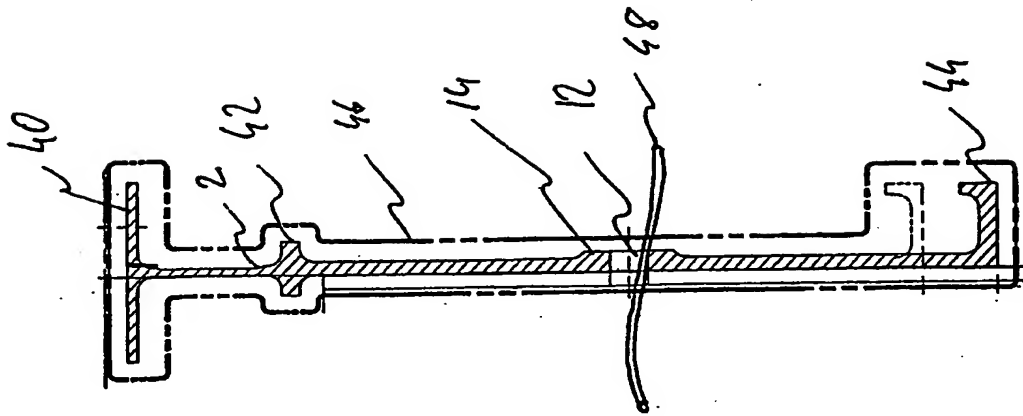


Fig. 4

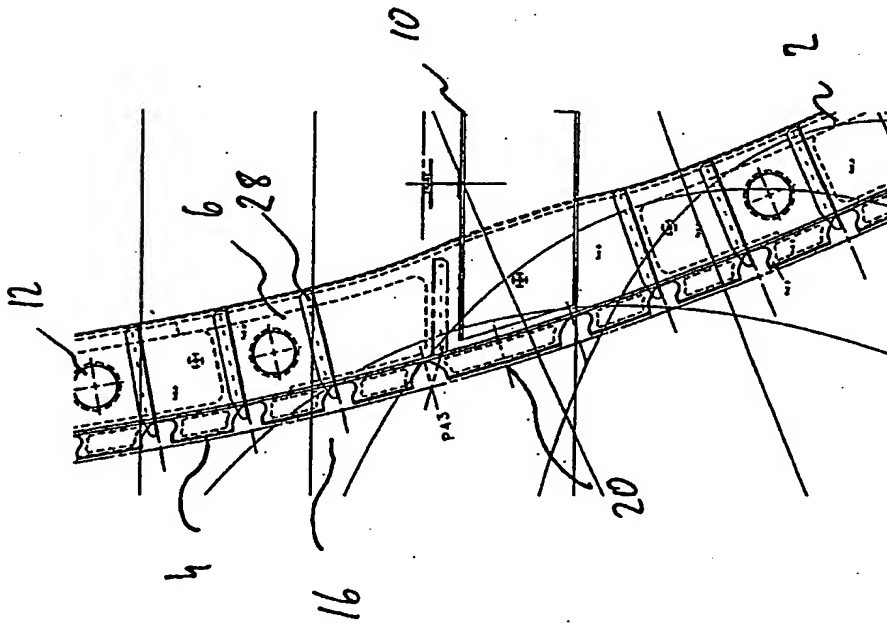


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
**PCT/EP2004/003308**

**A. CLASSIFICATION OF SUBJECT MATTER**  
**IPC 7 B64C1/06**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

**IPC 7 B64C**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**EPO-Internal, WPI Data**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 518 208 A (ROSEBURG LAWRENCE E) 21 May 1996 (1996-05-21)	1,2,7-9
Y	column 3, line 22 -column 6, line 60; figures	3-5
Y	US 2001/015043 A1 (ZINK WALTER ET AL) 23 August 2001 (2001-08-23) paragraph *0036!; figures	3,4
Y	US 1 851 211 A (RAGSDALE EARL J W) 29 March 1932 (1932-03-29) page 1, line 84-87; figure 1	5
Y	DE 35 31 028 A (VELDEN ALEXANDER JACOBUS MARIA) 5 March 1987 (1987-03-05) figure 1	5
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

**16 June 2004**

Date of mailing of the international search report

**25/06/2004**

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl  
Fax (+31-70) 340-3016

Authorized officer

**Salentiny, G**

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/003308

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 496 745 B1 (KILLIAN JOHN S) 17 December 2002 (2002-12-17) figure 2B	6
A	US 6 378 805 B1 (FILSEGGER HERMANN ET AL) 30 April 2002 (2002-04-30) column 4, line 23-28; figures	5,6
A	EP 1 245 317 A (JOBS SPA) 2 October 2002 (2002-10-02) the whole document	10-13
A	DE 36 32 288 A (BAYMAK FARUK) 7 April 1988 (1988-04-07) the whole document	10-13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/EP2004/003308

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5518208	A	21-05-1996	NONE	
US 2001015043	A1	23-08-2001	DE 10007995 A1 CA 2337725 A1 EP 1127785 A2	06-09-2001 22-08-2001 29-08-2001
US 1851211	A	29-03-1932	NONE	
DE 3531028	A	05-03-1987	DE 3531028 A1	05-03-1987
US 6496745	B1	17-12-2002	AU 6658201 A CA 2408779 A1 EP 1285316 A2 JP 2003533406 T WO 0188646 A1	26-11-2001 22-11-2001 26-02-2003 11-11-2003 22-11-2001
US 6378805	B1	30-04-2002	AT 405813 B AT 190397 A WO 9924316 A1 AT 221486 T AU 9727698 A CA 2309647 A1 DE 59805041 D1 EP 1030807 A1 ES 2180206 T3	25-11-1999 15-04-1999 20-05-1999 15-08-2002 31-05-1999 20-05-1999 05-09-2002 30-08-2000 01-02-2003
EP 1245317	A	02-10-2002	IT B020010180 A1 CN 1377810 A EP 1245317 A1 US 2002148271 A1	27-09-2002 06-11-2002 02-10-2002 17-10-2002
DE 3632288	A	07-04-1988	DE 3632288 A1 CH 671000 A5 DE 3790556 C1 WO 8801967 A1 EP 0282541 A1 GB 2207345 A ,B US 4993666 A	07-04-1988 31-07-1989 31-10-1996 24-03-1988 21-09-1988 01-02-1989 19-02-1991